

Probabilistically Cloning and Quantum Computation *

GAO Ting^{1,2}, YAN Feng-Li^{3,4}, Wang Zhi-Xi²

¹College of Mathematics and Information Science, Hebei Normal University, Shijiazhuang 050016, China

²Department of Mathematics, Capital Normal University, Beijing 100037, China

³CCAST (World Laboratory), P.O. Box 8730, Beijing 100080, China

⁴College of Physics, Hebei Normal University, Shijiazhuang 050016, China

We discuss the usefulness of quantum cloning and present examples of quantum computation tasks for which cloning offers an advantage which cannot be matched by any approach that does not resort to it. In these quantum computations, we need to distribute quantum information contained in states about which we have some partial information. To perform quantum computations, we use state-dependent probabilistic quantum cloning procedure to distribute quantum information in the middle of a quantum computation.

PACS: 03.67.Lx, 42.50.Dv

Cloning is very useful in classical computing and easy to accomplish with classical information. However, quantum cloning turns out not to be possible in general in quantum mechanics. This no-cloning theorem, independently discovered by Wootters and Zurek^[1] and Dieks^[2] in the early 1980s, is one of the most fundamental differences between classical and quantum information theories. It tells us that an unknown quantum state can not be copied exactly. Since determinately perfect copying is impossible, much effort has been put into developing optimal cloning processes.^[3–14] The universal quantum cloning machines were first invented by Bužek and Hillery^[3] and developed by other authors.^[4–12] The another kind of cloning procedure first designed by Duan and Guo^[13,14] is nondeterministic, consisting in adding an ancilla, performing unitary operations and measurements, with a postselection of the measurement results. The resulting clones are perfect, but the procedure only succeeds with a certain probability $p < 1$. The imperfect nature of quantum cloning procedure results in lower chances of getting the correct computational outputs at the end. Nonetheless, in some cases cloning improves our chances of correctly computing. Up to now, only a few examples are available to show that quantum cloning is useful in quantum computation.^[15–18] In this letter we investigate the possible use of quantum cloning machine and present examples of quantum computation tasks for which cloning offers an advantage which cannot be matched by any approach that does not resort to quantum cloning. In these quantum computations, we need to distribute quantum information contained in states about which we have some partial information. To perform quantum computations, we use state-dependent probabilistic quantum cloning procedure discussed by Duan and Guo^[13,14] to distribute quantum information in the middle of a quantum computation. Next we propose a generalization of examples.^[15,16,17]

Let us consider the scenario. There are two different quantum computations with first computational step U_0 in common. We need to find a scheme that obtains the two computation results with as large a probability as possible, using U_0 only once (this may happen if U_0 is a complex, lengthy computation). Possible schemes may or may not resort to cloning to distribute quantum information; the quantum computational tasks below show that performance is enhanced if we distribute quantum information using quantum cloning.

Suppose that there are three quantum black-boxes. What each black-box does is to accept one 2-level quantum system as an input and apply a unitary operator to it, producing the evolved state as an output. The black-boxes consist of arbitrary quantum circuits that query a given function only once. The query of function f_i is the unitary such that $|x\rangle|y\rangle \rightarrow |x\rangle|y \oplus f_i(x)\rangle$, where the symbol $\oplus$ denotes the bitwise *XOR* operation. Our task will involve determining two functionals, one depending only on f_0 and f_1 , and the other on f_0 and f_2 .

Consider all functions h_i which take n bits to one bit and write $h_{a_0a_1\cdots a_{2^n-1}}$ to stand for the function h such that $h(k) = a_k$, $k = 0, 1, \cdots, 2^n - 1$ (e.g. $h_{a_0a_1a_2a_3a_4a_5a_6a_7}$ denotes $h(000) = a_0$, $h(001) = a_1$, $h(010) = a_2$, $h(011) = a_3$, $h(100) = a_4$, $h(101) = a_5$, $h(110) = a_6$, $h(111) = a_7$). We define some sets of functions that will be useful in stating our task:

$$S_{f_0}^3 = \{h_{01000000}, h_{01010101}, h_{11000011}\},$$

*Supported by National Natural Science Foundation of China under Grant No. 10271081 and Hebei Natural Science Foundation under Grant No. A2004000141.

$$\begin{aligned} S_1^3 &= \{h_{01000000}, h_{10110000}, h_{10001100}, h_{00100110}, h_{00010101}, h_{10000011}, h_{00101001}, h_{00011010}\}, \\ S_2^3 &= \{h_{00000000}, h_{00001111}, h_{01010101}, h_{00110011}, h_{10011001}, h_{11000011}, h_{01101001}, h_{10100101}\}, \end{aligned}$$

$$S_{f_{12}}^3 = S_1^3 \cup S_2^3,$$

$$\begin{aligned} H_{00000000}^3 &= \{h_{00000000}, h_{11111111}\}, H_{00001111}^3 = \{h_{00001111}, h_{11110000}\}, H_{01010101}^3 = \{h_{01010101}, h_{10101010}\}, \\ H_{00110011}^3 &= \{h_{00110011}, h_{11001100}\}, H_{10011001}^3 = \{h_{10011001}, h_{01100110}\}, H_{11000011}^3 = \{h_{11000011}, h_{00111100}\}, \\ H_{01101001}^3 &= \{h_{01101001}, h_{10010110}\}, H_{10100101}^3 = \{h_{10100101}, h_{01011010}\}, \end{aligned}$$

$$S_f^3 = H_{00000000}^3 \cup H_{00001111}^3 \cup H_{01010101}^3 \cup H_{00110011}^3 \cup H_{10011001}^3 \cup H_{11000011}^3 \cup H_{01101001}^3 \cup H_{10100101}^3.$$

$$S_{f_0}^{n+1} = \{h_{a_0 a_1 a_2 \dots a_{2^n-1} a_0 a_1 a_2 \dots a_{2^n-1}} \mid h_{a_0 a_1 a_2 \dots a_{2^n-1}} \in S_{f_0}^n\},$$

$$\begin{aligned} S_1^{n+1} &= \{h_{a_0 a_1 a_2 \dots a_{2^n-1} a_0 a_1 a_2 \dots a_{2^n-1}}, h_{\overline{a_0 a_1 a_2 \dots a_{2^n-1}} a_0 a_1 a_2 \dots a_{2^n-1}} \mid h_{a_0 a_1 a_2 \dots a_{2^n-1}} \in S_1^n\}, \\ S_2^{n+1} &= \{h_{a_0 a_1 a_2 \dots a_{2^n-1} a_0 a_1 a_2 \dots a_{2^n-1}}, h_{\overline{a_0 a_1 a_2 \dots a_{2^n-1}} a_0 a_1 a_2 \dots a_{2^n-1}} \mid h_{a_0 a_1 a_2 \dots a_{2^n-1}} \in S_2^n\}, \end{aligned}$$

$$S_{f_{12}}^{n+1} = S_1^{n+1} \cup S_2^{n+1},$$

$$\begin{aligned} H_{a_0 a_1 a_2 \dots a_{2^n-1} a_0 a_1 a_2 \dots a_{2^n-1}}^{n+1} &= \{h_{a_0 a_1 a_2 \dots a_{2^n-1} a_0 a_1 a_2 \dots a_{2^n-1}}, h_{\overline{a_0 a_1 a_2 \dots a_{2^n-1}} a_0 a_1 a_2 \dots a_{2^n-1}} \mid h_{a_0 a_1 a_2 \dots a_{2^n-1}} \in S_2^n\}, \\ H_{\overline{a_0 a_1 a_2 \dots a_{2^n-1}} a_0 a_1 a_2 \dots a_{2^n-1}}^{n+1} &= \{h_{\overline{a_0 a_1 a_2 \dots a_{2^n-1}} a_0 a_1 a_2 \dots a_{2^n-1}}, h_{a_0 a_1 a_2 \dots a_{2^n-1} \overline{a_0 a_1 a_2 \dots a_{2^n-1}}} \mid h_{a_0 a_1 a_2 \dots a_{2^n-1}} \in S_2^n\}, \end{aligned}$$

$$S_f^{n+1} = \bigcup_{h_{a_0 a_1 a_2 \dots a_{2^n-1}} \in S_2^n} (H_{a_0 a_1 a_2 \dots a_{2^n-1} a_0 a_1 a_2 \dots a_{2^n-1}}^{n+1} \cup H_{\overline{a_0 a_1 a_2 \dots a_{2^n-1}} a_0 a_1 a_2 \dots a_{2^n-1}}^{n+1}).$$

Here $n = 3, 4, \dots$, $\overline{a_k} = \begin{cases} 0, & \text{if } a_k = 1 \\ 1, & \text{if } a_k = 0, \end{cases} \quad k = 0, 1, 2, \dots, 2^n - 1.$

Now we randomly choose a function $f_0 \in S_{f_0}^n$ and then pick two other functions f_1 and f_2 from the set $S_{f_{12}}^n$, also at random but satisfying:

$$f_0 \oplus f_1, \quad f_0 \oplus f_2 \in S_f^n. \quad (1)$$

Here the symbol $\oplus$ is addition modulo 2. The task will be to find in which of the 2^n sets H^n 's lie each of the functions $f_0 \oplus f_1$ and $f_0 \oplus f_2$, applying quantum circuits that query f_0, f_1 , and f_2 at most once each. Our score will be given by the average probability of successfully guessing both correctly.

Just as [15] the best no-cloning strategy is as follows. First, from Eq.(1) we know that both f_1 and f_2 must be in S_1^n if $f_0 = h_{\{01000000\}^{2^n-3}}$, and f_1 and f_2 must belong to S_2^n if f_0 is either $h_{\{01010101\}^{2^n-3}}$ or $h_{\{11000011\}^{2^n-3}}$, where $\{a_0 a_1 \dots a_7\}^{2^n-3}$ means 2^{n-3} copies of $a_0 a_1 \dots a_7$. It implies that the probability of both f_1 and f_2 in S_2^n is $2/3$. Assume that it is the case, then we can discriminate between the two possibilities for f_0 with a single, classical function call. Furthermore, by using the quantum circuit in Fig.1 twice (once each with f_1 and f_2) we can distinguish the 2^n possibilities for functions f_1 and f_2 , because this quantum circuit results in one of the 2^n orthogonal states

$$|\varphi_i\rangle = 2^{-\frac{n}{2}} \sum_{x=0}^{2^n-1} (-1)^{f_i(x)} |x\rangle. \quad (2)$$

Thus we can determine functions f_0, f_1 , and f_2 correctly with probability $p = 2/3$ and accomplish our task. Even in the case where the initial assumption about f_0 was wrong, the chances of guessing right are $1/2^{2^n}$. Therefore, the best no-cloning average score is

$$p_1 = \frac{2}{3} + \frac{1}{3} \times \frac{1}{2^{2^n}} < 0.7. \quad (3)$$

Next we will see that the task which can be much better performed if we use probabilistic quantum cloning. The quantum circuit that we use to solve this problem is depicted in Fig. 2.

Immediately after querying function f_0 , we obtain one of three possible linearly independent states (each corresponding to one of the possible f_0 's):

$$|h_{\{01000000\}^{2^n-3}}\rangle \equiv 2^{-\frac{n}{2}} \sum_{j=0}^{2^{n-3}-1} (|2^3j\rangle - |2^3j+1\rangle + |2^3j+2\rangle + |2^3j+3\rangle + |2^3j+4\rangle + |2^3j+5\rangle + |2^3j+6\rangle + |2^3j+7\rangle), \quad (4)$$

$$|h_{\{01010101\}^{2^n-3}}\rangle \equiv 2^{-\frac{n}{2}} \sum_{j=0}^{2^{n-3}-1} (|2^3j\rangle - |2^3j+1\rangle + |2^3j+2\rangle - |2^3j+3\rangle + |2^3j+4\rangle - |2^3j+5\rangle + |2^3j+6\rangle - |2^3j+7\rangle), \quad (5)$$

$$|h_{\{11000011\}^{2^n-3}}\rangle \equiv 2^{-\frac{n}{2}} \sum_{j=0}^{2^{n-3}-1} (-|2^3j\rangle - |2^3j+1\rangle + |2^3j+2\rangle + |2^3j+3\rangle + |2^3j+4\rangle + |2^3j+5\rangle - |2^3j+6\rangle - |2^3j+7\rangle). \quad (6)$$

By Theorem 2 in [13] and the method in [16] we derive the following exact achievable cloning efficiencies (defined as the probability of cloning successfully) for each of states (4)–(6)

$$\gamma_1 \equiv \gamma(|h_{\{01000000\}^{2^n-3}}\rangle) = \frac{7}{127}, \quad (7)$$

$$\gamma_2 \equiv \gamma(|h_{\{01010101\}^{2^n-3}}\rangle) = \gamma_3 \equiv \gamma(|h_{\{11000011\}^{2^n-3}}\rangle) = \frac{112}{127}. \quad (8)$$

After the cloning process the measurement outcome on a "flag" subsystem will tell us whether the cloning was successful or not. For this particular cloning process, the probability of success is, on average, $P_{\text{success}} = (\gamma_1 + \gamma_2 + \gamma_3)/3 = \frac{77}{127}$. If it was successful, then each of the cloning branches goes through the second part of the circuit in Fig.2, to yield one of the 2^n orthogonal states:

$$|h_{a_0a_1a_2\cdots a_{2^n-1}}\rangle = 2^{-\frac{n}{2}} \sum_{x=0}^{2^n-1} (-1)^{a_x} |x\rangle, \quad (9)$$

which can be discriminated unambiguously. Here $h_{a_0a_1a_2\cdots a_{2^n-1}} \in S_2^n$. Therefore, if the cloning process is successful, we manage to accomplish our task.

However, the cloning process may fail with probability $(1 - P_{\text{success}})$. If this occurs, it is more likely to be $h_{\{01000000\}^{2^n-3}}$ than the other two, because of the relatively low cloning efficiency for the state in Eq.(4), in relation to the states in Eqs.(5) and (6) [see Eqs. (7) and (8)]. Guessing that $f_0 = h_{\{01000000\}^{2^n-3}}$, we are right with probability

$$p_{\{01000000\}^{2^n-3}} = \frac{(1 - \gamma_1)}{(1 - \gamma_1) + (1 - \gamma_2) + (1 - \gamma_3)} = \frac{4}{5}. \quad (10)$$

Note that only the 2^n functions in S_1^n can be candidates for f_1 and f_2 on condition that $f_0 = h_{\{01000000\}^{2^n-3}}$. These 2^n possibilities can be discriminated unambiguously by run a circuit like that of Fig.1 twice, once with f_1 and once with f_2 , since the circuit produces one of 2^n orthogonal states, each corresponding to one of the 2^n possibilities for f_i . Therefore if our guess that $f_0 = h_{\{01000000\}^{2^n-3}}$ was correct, we are able to find the correct f_1 and f_2 and therefore accomplish our task. In the case that $f_0 \neq h_{\{01000000\}^{2^n-3}}$ after all, we may still have guessed the right sets with probability $1/2^{2n}$.

The above considerations lead to an overall probability of success given by

$$\begin{aligned} p_2 &= p_{\text{success}} + (1 - p_{\text{success}})[p_{\{01000000\}^{2^n-3}} + (1 - p_{\{01000000\}^{2^n-3}})\frac{1}{2^{2n}}] \\ &= \frac{117}{127} + \frac{5}{127 \times 2^{2n-1}} \\ &> \frac{117}{127} \\ &> p_1. \end{aligned} \quad (11)$$

It shows that this cloning approach is more efficient than the previous one, which does not use cloning.

If we take

$$S_{f_0}^2 = \{h_{0100}, h_{0011}, h_{1001}\},$$

$$S_1^2 = \{h_{0001}, h_{0010}, h_{0100}, h_{1000}\}, S_2^2 = \{h_{0000}, h_{0011}, h_{0101}, h_{1001}\},$$

$$S_{f_{12}}^2 = S_1^2 \cup S_2^2,$$

$$H_{0000}^2 = \{h_{0000}, h_{1111}\}, H_{0101}^2 = \{h_{0101}, h_{1010}\}, H_{0011}^2 = \{h_{0011}, h_{1100}\}, H_{1001}^2 = \{h_{1001}, h_{0110}\},$$

$$S_f^2 = H_{0000}^2 \cup H_{0101}^2 \cup H_{0011}^2 \cup H_{1001}^2;$$

$$S_{f_0}^{n+1} = \{h_{a_0 a_1 a_2 \dots a_{2^n-1} a_0 a_1 a_2 \dots a_{2^n-1}} \mid h_{a_0 a_1 a_2 \dots a_{2^n-1}} \in S_{f_0}^n\},$$

$$\begin{aligned} S_1^{n+1} &= \{h_{a_0 a_1 a_2 \dots a_{2^n-1} a_0 a_1 a_2 \dots a_{2^n-1}}, h_{\overline{a_0 a_1 a_2 \dots a_{2^n-1}} a_0 a_1 a_2 \dots a_{2^n-1}} \mid h_{a_0 a_1 a_2 \dots a_{2^n-1}} \in S_1^n\}, \\ S_2^{n+1} &= \{h_{a_0 a_1 a_2 \dots a_{2^n-1} a_0 a_1 a_2 \dots a_{2^n-1}}, h_{\overline{a_0 a_1 a_2 \dots a_{2^n-1}} a_0 a_1 a_2 \dots a_{2^n-1}} \mid h_{a_0 a_1 a_2 \dots a_{2^n-1}} \in S_2^n\}, \end{aligned}$$

$$S_{f_{12}}^{n+1} = S_1^{n+1} \cup S_2^{n+1},$$

$$\begin{aligned} H_{a_0 a_1 a_2 \dots a_{2^n-1} a_0 a_1 a_2 \dots a_{2^n-1}}^{n+1} &= \{h_{a_0 a_1 a_2 \dots a_{2^n-1} a_0 a_1 a_2 \dots a_{2^n-1}}, h_{\overline{a_0 a_1 a_2 \dots a_{2^n-1}} a_0 a_1 a_2 \dots a_{2^n-1}} \mid h_{a_0 a_1 a_2 \dots a_{2^n-1}} \in S_2^n\}, \\ H_{\overline{a_0 a_1 a_2 \dots a_{2^n-1}} a_0 a_1 a_2 \dots a_{2^n-1}}^{n+1} &= \{h_{\overline{a_0 a_1 a_2 \dots a_{2^n-1}} a_0 a_1 a_2 \dots a_{2^n-1}}, h_{a_0 a_1 a_2 \dots a_{2^n-1} \overline{a_0 a_1 a_2 \dots a_{2^n-1}}} \mid h_{a_0 a_1 a_2 \dots a_{2^n-1}} \in S_2^n\}, \end{aligned}$$

$$S_f^{n+1} = \bigcup_{h_{a_0 a_1 a_2 \dots a_{2^n-1}} \in S_2^n} (H_{a_0 a_1 a_2 \dots a_{2^n-1} a_0 a_1 a_2 \dots a_{2^n-1}}^{n+1} \cup H_{\overline{a_0 a_1 a_2 \dots a_{2^n-1}} a_0 a_1 a_2 \dots a_{2^n-1}}^{n+1}).$$

Here $n = 2, 3, 4, \dots$, $\overline{a_k} = \begin{cases} 0, & \text{if } a_k = 1 \\ 1, & \text{if } a_k = 0 \end{cases}$, $k = 0, 1, 2, \dots, 2^n - 1$. Following the same procedure as before, we derive that the best no-cloning average score is still

$$p_1 = \frac{2}{3} + \frac{1}{3} \times \frac{1}{2^{2n}} < 0.7, \quad (12)$$

but the analytic achievable cloning efficiencies are

$$\gamma_1 \equiv \gamma(|h_{\{0100\}^{2^n-2}}\rangle) = \frac{1}{7}, \quad (13)$$

$$\gamma_2 \equiv \gamma(|h_{\{0011\}^{2^n-2}}\rangle) = \gamma_3 \equiv \gamma(|h_{\{1001\}^{2^n-2}}\rangle) = \frac{4}{7}, \quad (14)$$

and the overall probability of success with cloning is

$$\begin{aligned} p_2 &= \frac{5}{7} + \frac{2}{7 \times 2^{2n-1}} \\ &> \frac{5}{7} \\ &> p_1. \end{aligned} \quad (15)$$

Besides the larger probability of obtaining the correct result, the quantum cloning offers another advantage: the measurement of the 'flag' state makes us to be confident about having the correct result in a larger fraction of our attempts. For the above second probabilistic cloning machine described by $\gamma_1 = \frac{1}{7}$, $\gamma_2 = \gamma_3 = \frac{4}{7}$ this fraction was $\frac{3}{7}$, but this can be improved by choosing different cloning machine, e.g. the first one above characterized by $\gamma_1 = \frac{7}{127}$, $\gamma_2 = \gamma_3 = \frac{112}{127}$, the fraction of which is $\frac{77}{127}$.

In summary, we study the possible use of quantum cloning machine and give examples of quantum computation tasks which attain optimal performance by using an intermediate quantum cloning step. We show that preserving and distributing quantum information through a cloning process offers advantages over extracting classical information mid-way in the quantum computation.

References

- [1] Wootters W K and Zurek W H 1982 *Nature (London)* **299** 802
- [2] Dieks D 1982 *Phys. Lett. A* **92** 271
- [3] Bužek V and Hillery M 1996 *Phys. Rev. A* **54** 1844
- [4] Gisin N and Massar S 1997 *Phys. Rev. Lett.* **79** 2153
- [5] Gisin N 1998 *Phys. Lett. A* **242** 1
- [6] Werner R F 1998 *Phys. Rev. A* **58** 1827
- [7] Keyl M and Werner R F 1999 *J. Math. Phys.* **40** 3283
- [8] Bruß D and Macchiavello C 1999 *Phys. Lett. A* **253** 249
- [9] Bruß D, Ekert A and Macchiavello C 1998 *Phys. Rev. Lett.* **81** 2598
- [10] Bužek V, Hillery M and Bednik R 1998 *Acta Phys. Slov.* **48** 177
- [11] Nicolas J. Cerf 2000 *J. Mod. Opt.* **47** 187
- [12] Bužek V, Braunstein S, Hillery M and Bruß D 1997 *Phys. Rev. A* **56** 3446
- [13] Duan L M and Guo G C 1998 *Phys. Rev. Lett.* **80** 4999
- [14] Duan L M and Guo G C 1999 *Commun. Theor. Phys.* **31** 223
- [15] Galvão E F and Hardy L 2000 *Phys. Rev. A* **62** 022301
- [16] Gao T, Yan F L, and Wang Z X 2004 *J. Phys. A: Math. Gen.* **37** 3211
- [17] Gao T, Yan F and Wang Z, e-print archive quant-ph/0308036
- [18] Bechmann-Pasquinucci H and Gisin N 1999 *Phys. Rev. A* **59** 4238

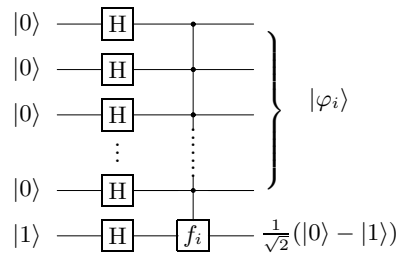


FIG. 1: If function f_i is guaranteed to be either in set S_1^n or in S_2^n , then this quantum circuit can be used to distinguish between the 2^n possibilities in each set. We can determine f_i by measuring the final state $|\varphi_i\rangle = 2^{-\frac{n}{2}} \sum_{x=0}^{2^n-1} (-1)^{f_i(x)} |x\rangle$ in one of two orthogonal bases, depending on which set contains f_i . Here H operations are Hadamard gates.

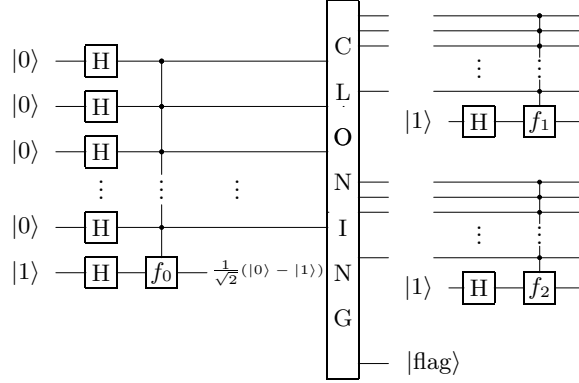


FIG. 2: The cloning procedure in this circuit is probabilistic. After the cloning process we can measure a "flag" subsystem and know whether the cloning was successful or not. If the cloning is successful, we let the clones go through the rest of the circuit, yielding output states $|\varphi_i\rangle = 2^{-\frac{n}{2}} \sum_{x=0}^{2^n-1} (-1)^{f_0(x) \oplus f_i(x)} |x\rangle$ ($i = 1, 2$). These states can be measured in the basis defined by Eqs.(9) to unambiguously decide which of the 2^n sets H^n 's contains $f_0 \oplus f_i$.